


# CAD-CUT® PATTERN



## IT'S SO EASY TO BE INDIVIDUAL!

Get unique designs with our CAD-CUT® patterns. Select a pattern of your choice from our catalog or create your very own look. All we need is your design as a repeatable file and you will receive your individual plotting film. CAD-CUT® Pattern is characterized by a soft, pleasant feel. It is ideal for cutting small details and is very easy to weed.

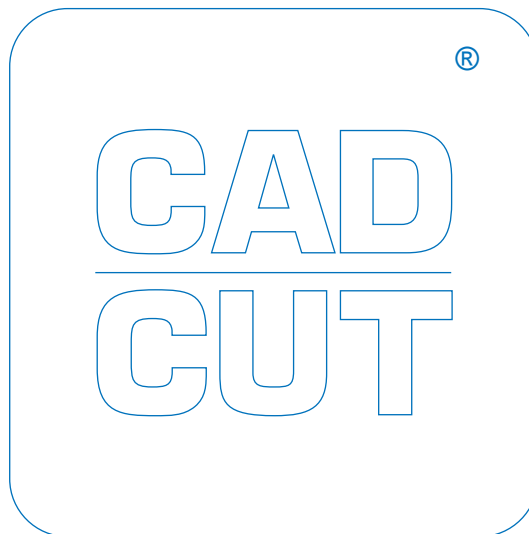

## AVAILABLE IN

50 cm x 25 m roll

100 cm x 25 m roll

## RECOMMENDED FABRICS \* Test before application!

- 100 % Cotton
- 100 % Polyester\*
- Polyester-Cotton blends
- 100 % Nylon

## CUTTING NOTES

Always test the cutting settings before production. The settings depend on the age of the knife used. To ensure optimum processing of the material. **Minimum line thickness of 1 mm.**

## APPLICATION INSTRUCTIONS

Temperature: 130° C / 150° C

Time: 10 sec. / 5 sec.

Pressure: Medium (#4-6 with Hotronix®)

Carrier: Hot / cold peel

## MULTI-COLOR DESIGNS

Print the background for 3 - 5 seconds, peel off the carrier cold. Repeat the process for each additional color. Print the last color for 13 -15 seconds. Peel off the carrier hot.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

## CARE INSTRUCTIONS

Washable up to 60° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

## STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



Easy weed



Ironable



Ironable only  
inside out



Washable up to  
60°



Sublimation blocking



Stretchable



Flock



Thin



Sticky carrier



Multi-color  
application



Peel hot



Application



Pressure

# CAD-CUT® PATTERN




color swirl



musical heart




rainbow lines



mosaic colors



eye of the peacock




red lines



natural wood



colorful honeycomb




hexagon




symbolic signs




energy




bubbles




bluegold



inks



berry drops




berry nature




viva magenta



spring flower pastel green



spring flower purple



spring flower white




spring sky pink




spring sky purple



spring sky blue



butterfly pastel green




butterfly lilac




butterfly black




XMas holo red



XMas holo blue




XMas holo green



Snowflakes red



Snowflakes green



Snowflakes anthracite