

CAD-CUT® BASIC FILM



SMOOTH AND MATTE PU MATERIAL THAT PROVIDES OPTIMAL OPACITY

There is no back-adhesive carrier which makes it perfect for large designs, numbers and letters as the film is so easy to weed.

Low cost - very easy to process (no need for capitalizing).



AVAILABLE IN

50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton
- 100 % Polyester*
- Cotton-Polyester blends

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. To ensure optimum processing of the material, a **minimum line thickness of 1.5 mm is required.**

APPLICATION INSTRUCTIONS


Temperature: 160° C
Time: 10 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Cold peel

MULTI-COLOR DESIGNS

Print the background for 3-5 seconds, peel off the carrier cold. Repeat the process for each additional color. Print the last color for 18 - 20 seconds. Remove the carrier cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

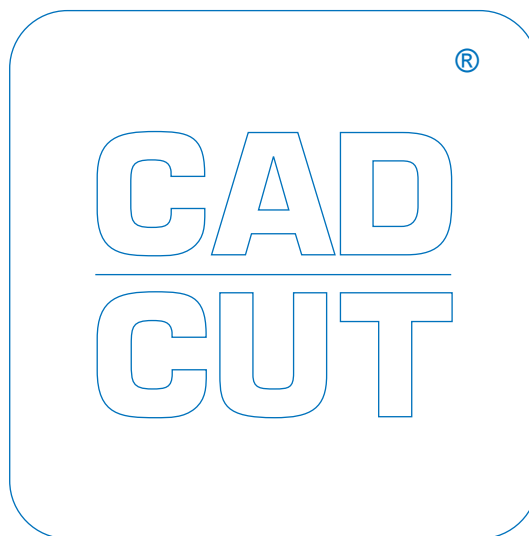

CARE INSTRUCTIONS

Washable up to 60° C. Please do not use fabric softener or bleach. Wash inside out and iron.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



Easy weed



Ironable



Ironable only inside out



Washable up to



Sublimation blocking



Stretchable



Flock



Thin



Sticky carrier



Multi-color application



Peel hot












Application



Pressure

CAD-CUT® BASIC FILM



	001 white		110 yellow ca. Pant. 012c		200 red ca. Pant. 186c		300 royal blue ca. Pant. 286c		350 navy ca. Pant. 532c
	400 green ca. Pant. 7727c		700 black		815 silver ca. Pant. 877c		115 gold ca. Pant. 871c		