CAD-CUT® REFLECTIVE

INCREASE VISIBILITY IN LOW-LIGHT CONDITIONS, DIN 20471 CERTIFIED.

Highly reflective flex film, ideal for applications in the security sector. Ideal for plotting larger motifs as the material has no adhesive backing. Available in the color silver.

OEKO TEX® STANDARD 100

AVAILABLE IN

· 50 cm x 25 m roll

RECOMMENDED FABRICS   * Test before application!

· 100 % Cotton

· 100 % Polyester*

· Sublimation dyed polyester

· Cotton-Polyester blends

· 100 % Nylon*

· Nylon blended fabric*

CUTTING NOTES

IMPORTANT: Remove the protective backing before cutting and always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. **Minimum line thickness of 3 mm.**
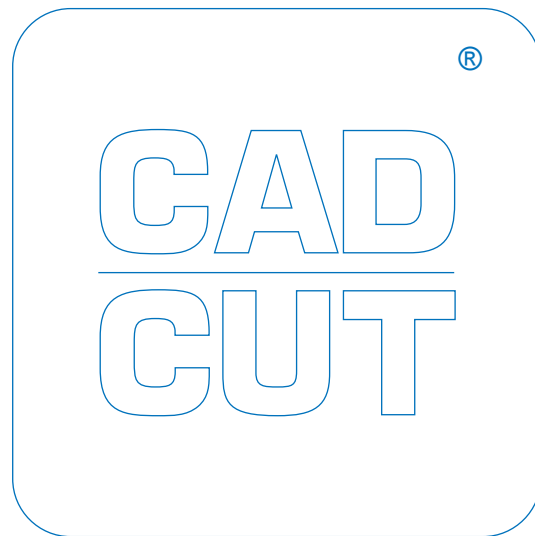
APPLICATION INSTRUCTIONS

Temperature: 150° C

Time: 5 sec.   Nachpressen: 5 sec.

Pressure: Medium (#4-6 with Hotronix®)

Carrier: hot peel

MULTI-COLOR DESIGNS

CAD-CUT® Reflective is not suitable for overprinting the films.

ACCESSORIES RECOMMENDED

· Grip Cover Sheet

· Cover Sheet - Non-Sticky

· EZ Weeder®, LED Weeder, LED Pin or Tweezers

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Do not use fabric softener or bleach. Can be ironed directly, do not dry clean.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

Icon	Description	Icon	Description
easy weed	Easy weed	Thin	Thin
Ironable	Ironable	Sticky carrier	Sticky carrier
Ironable only inside out	Ironable only inside out	Multi-color application	Multi-color application
60°	Washable up to	HOT PEEL	Peel hot
Sublistop	Sublimation blocking	160°C 12 sec	Application
Stretchable	Stretchable	MEDIUM	Pressure
FLOCK	Flock		

CAD-CUT® REFLECTIVE

silver reflective

STAHLS EUROPE

Almost all materials can be combined with each other and are suited for a variety of fabrics.
For further information please consult the product details online.

0525